

CREAM FILLING MACHINE



USER MANUAL

DIRECTORY

SPECIFICATIONS	4
II. IMPORTANT SAFEGUARDS	4
III.ILLUSTRATIONS	4
Parts of Gear pump	6
IV. PACKAGE INCLUDES & ASSEMBLE MACHINE	7
Steps of assemble this machine	7
V. OPERATING INSTRUCTIONS	8
VI. ORDINARY MALFUNCTION	9
I . SPECIFICATIONS	9
II . IMPORTANT SAFEGUARDS	9
III . ILLUSTRATIONS	10
IV . ASSEMBLE	10

**Thank you for purchasing our filling machine for your home or business!
With this high-quality and easy-to-use device, you can enjoy a picnic with
family and friends, or make more profit for your business.**

***Please read the instructions carefully before use.**

This manual contains three machine models: CT-01, CT-03, CT-08.

SPECIFICATIONS

Model	Voltage	Power	Filled grams	Size
CT08	220 V/50 Hz	400 W	Min.2G	350 * 350 * 550 MM


II. IMPORTANT SAFEGUARDS

- A. Make sure that your power supply matches with the power that marked on the product. The deviation is under 10%.
- B. Place the appliance on a level surface to prevent it from falling.
- C. Keep it out of reach of kids and incompetent persons.
- D. Never immerse it in water or any other liquid.
- E. If it shows any signs of damage, have it repaired by a qualified electrician.
- F. Remember to turn it off when it is not used.
- G. Please do not inject solid fillings.

III. ILLUSTRATIONS




Parts of Filling Machine

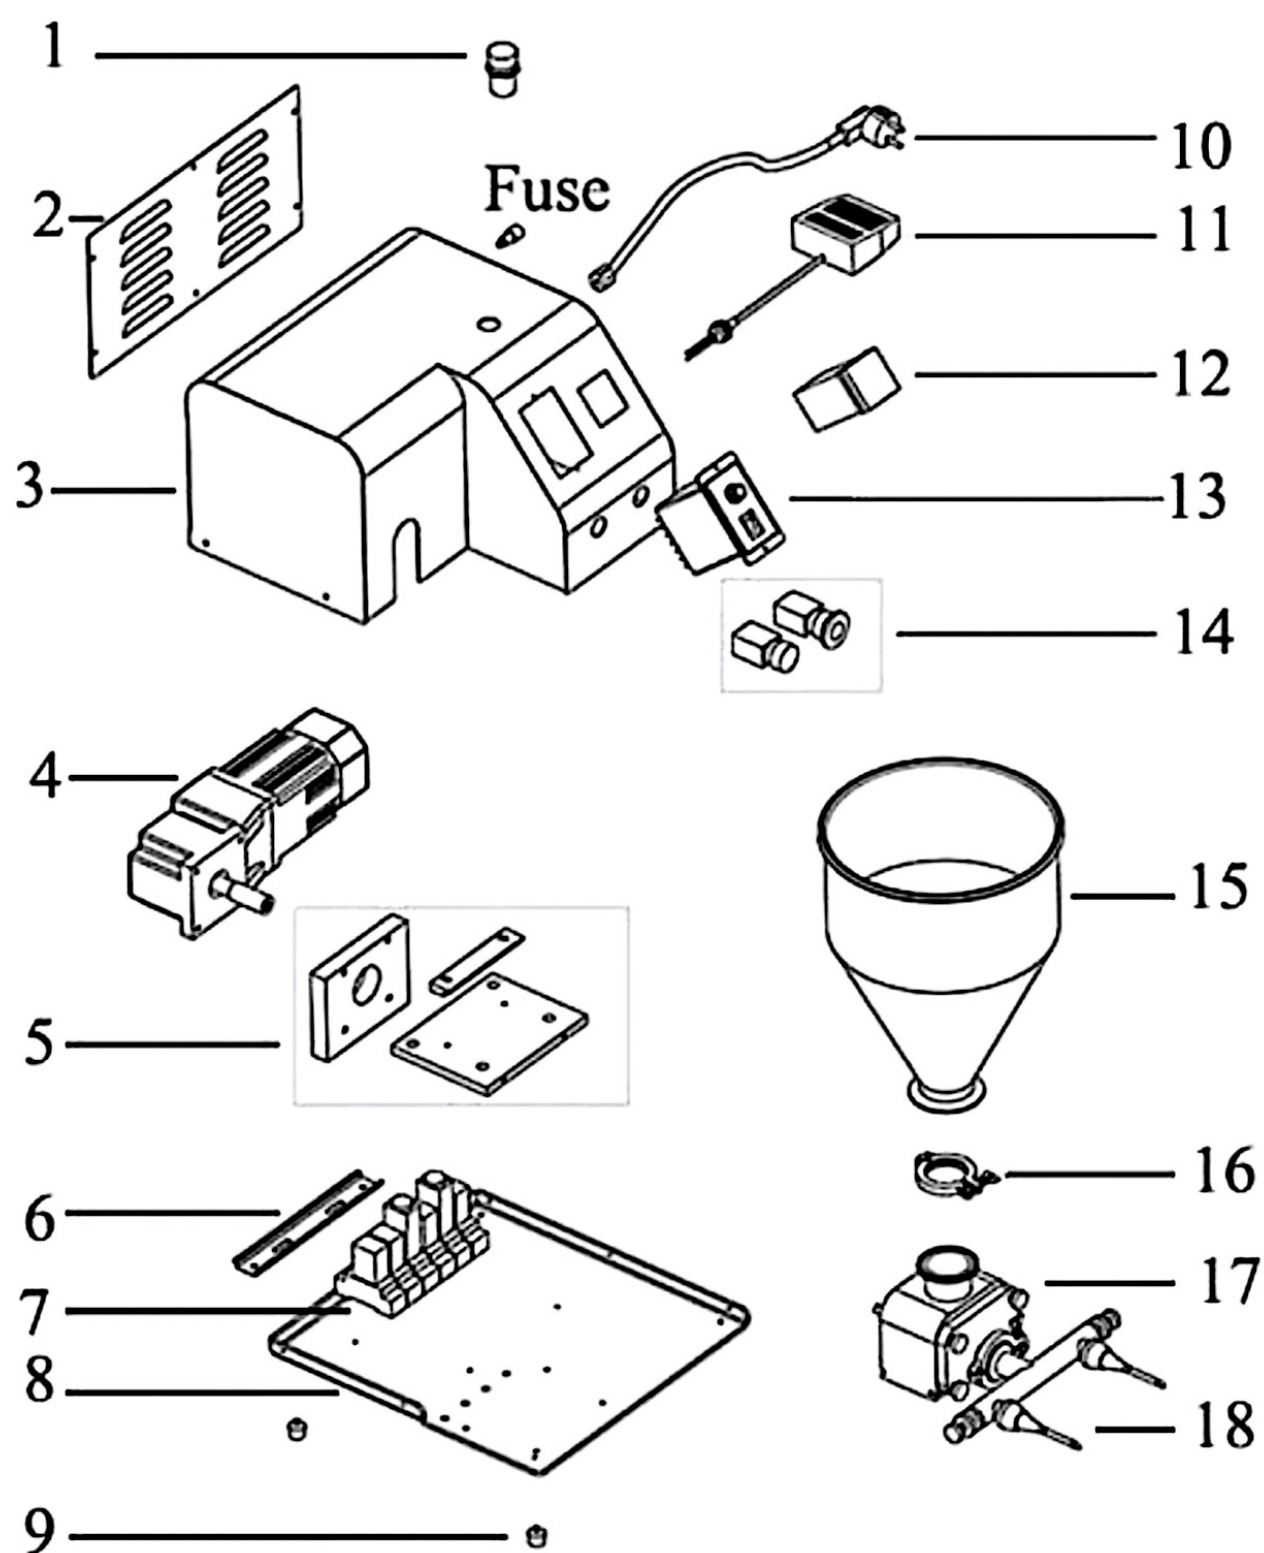

Parts of Filling machine			
NO.	Name	NO.	Name
1	Power indicator	10	Power cable
2	Back cover of electric box	11	Foot pedal
3	Electric box	12	Time regulator
4	Motor	13	Speed regulator
5	Fixed accessories of motor	14	Start and Stop button
6	Slideway	15	Hopper
7	Electronic parts	16	Fixed ring
8	Bottom plate	17	Gear pump
9	Rubber feet	18	Filling nozzle

Parts of Gear pump

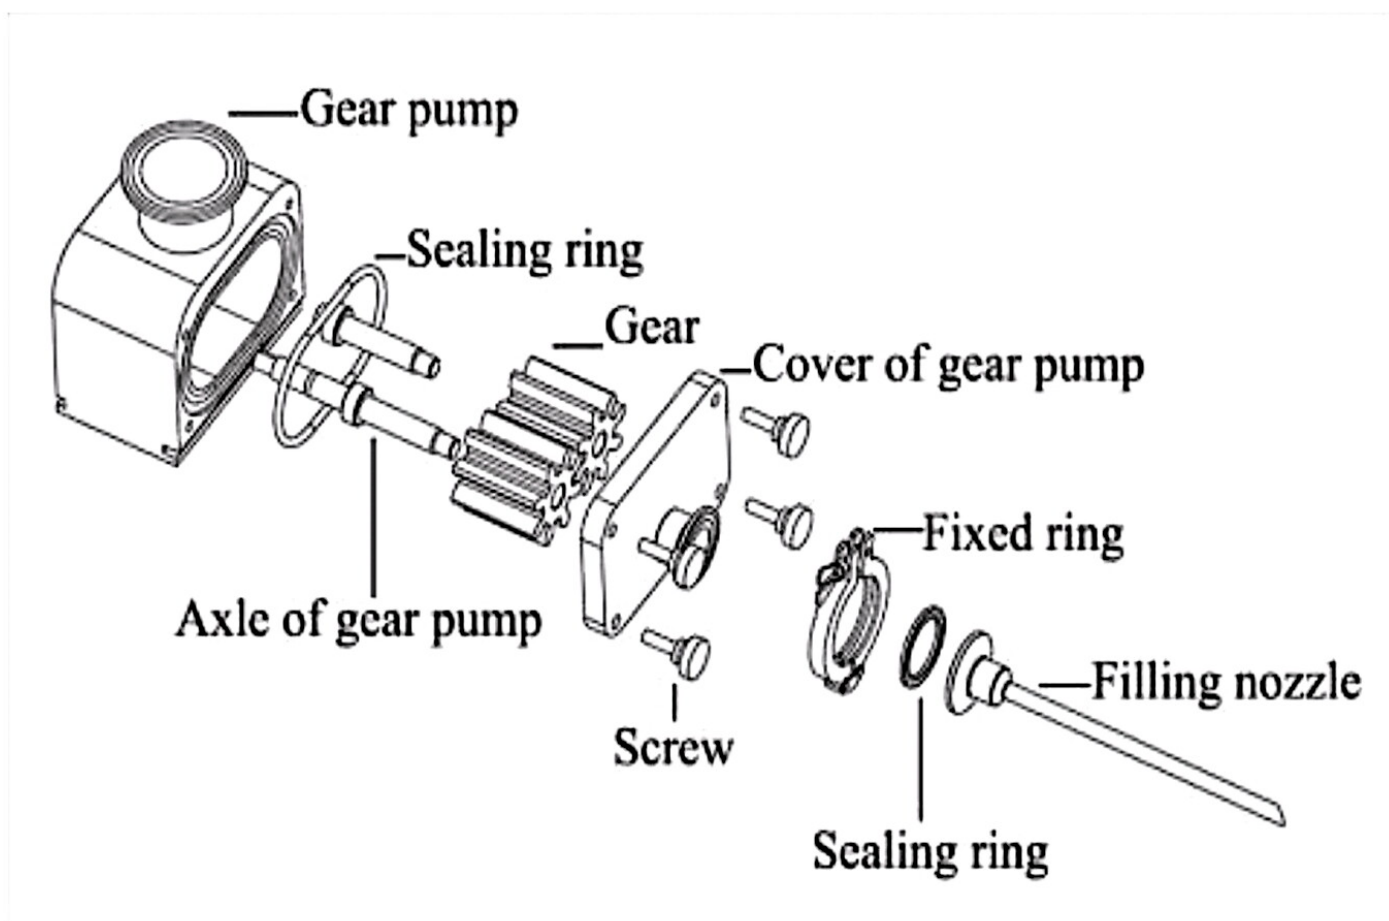

More filling nozzle parts are on sales



IV. PACKAGE INCLUDES & ASSEMBLE MACHINE

Package includes		
Filling machine X 1pcs	Screwdriver X 1pcs	Allen wrench X 1pcs

Steps of assemble this machine

1. Install the hopper. Put on the sealing ring firstly, and then fix the hopper and the host with fixing accessories.



2. Install the filling nozzle. Put the sealing ring firstly, and then use the fixing accessories to fix the filling nozzle and the host. Screw them tightly.



3. By adjusting the speed regulator, the injection speed of the injection can be increased, thereby increasing the injection volume. Adjust the time, you can increase the injection time, thereby increasing the injection volume.



V. OPERATING INSTRUCTIONS

1. Cleaning funnel, filling nozzle and the part that contact with food.
2. Put machine on a suitable place and check its conditions.
3. Before turning on the power, make sure that the hopper, filling nozzle, gear box(see Fixed spare parts) have been installed and fixed.
4. Adjust time regulator and speed regulator according to your needs.
5. Then press start button to fill the food.
6. If you want to stop filling, press stop button. Then machine will stop.
7. Clean the filling part when machine is not used.

VI. ORDINARY MALFUNCTION

Malfunction	The cause	Solution
Machine don't work	1. The power is not connected 2. The switch is stopped state 3. The forward speed and time are not set	1. Connect the power cord 2. Turn on the stop button 3. Set the speed of forward rotation and time
Leakage after filling	The reverse speed and time are not set	Open the host and adjust the time of forward rotation
No discharge during filling	1. The forward rotation time is not set or too short. 2. filling nozzle is blocked.	1 Reset the time of forward rotation until filling nozzle works. 2. Clean the filling nozzle.

I. SPECIFICATIONS

Name/Model	CT-01 Filling machine	CT03 Filling machine
Weight	7.5 KG	7.5 KG
Dimension	52 * 18 * 57 CM	52 * 18 * 57 CM
Suitable for	Jam, cream, etc.	Jam, cream, etc.

II. IMPORTANT SAFEGUARDS

1. Before using this equipment, be sure to place it on a flat place to prevent it falling and causing damage.

2. This equipment must be fixed on a stable workbench before operation.

Otherwise the equipment may fall due to imbalance and cause its damage, which may cause equipment malfunction.

3.If it is not used, the materials inside must be cleaned before storage.

4. This equipment can be soaked in water for cleaning.

5. After cleaning the parts, keep them in a dry state, then lubricate the parts with mineral oil or shortening, and finally store them or reinstall them in the equipment.


6. If the device is stuck during use, please do not deal with it force. Be patient to disassemble and remove all obstacles to from the device.

7. If there are any signs of damage from the equipment, taking it to the manufacturer,



your sale agent or a professional people to repair it.

8. This device is not suitable for people (including children) who have weak physical, sensory or mental abilities or lack of experience and knowledge.

III . ILLUSTRATIONS

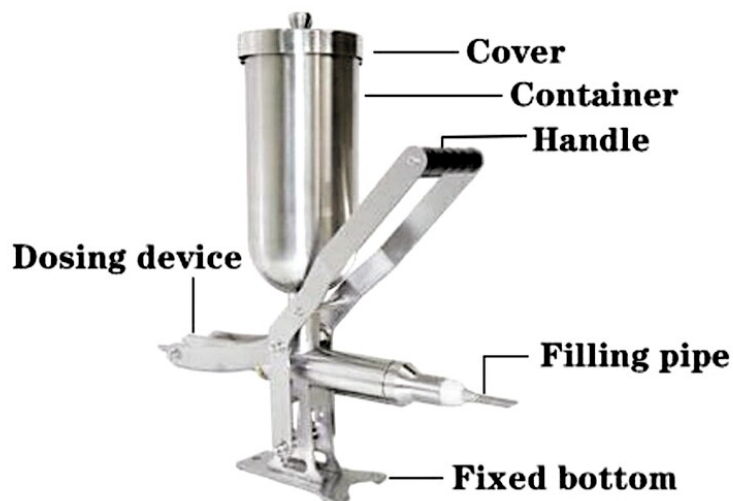

IV . ASSEMBLE

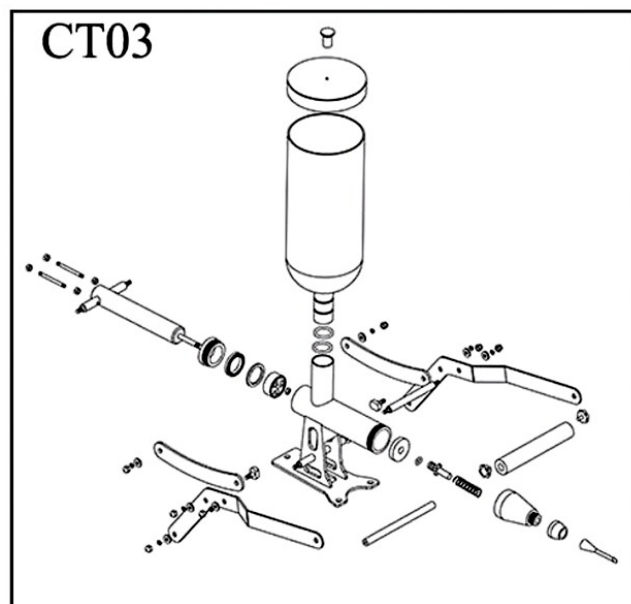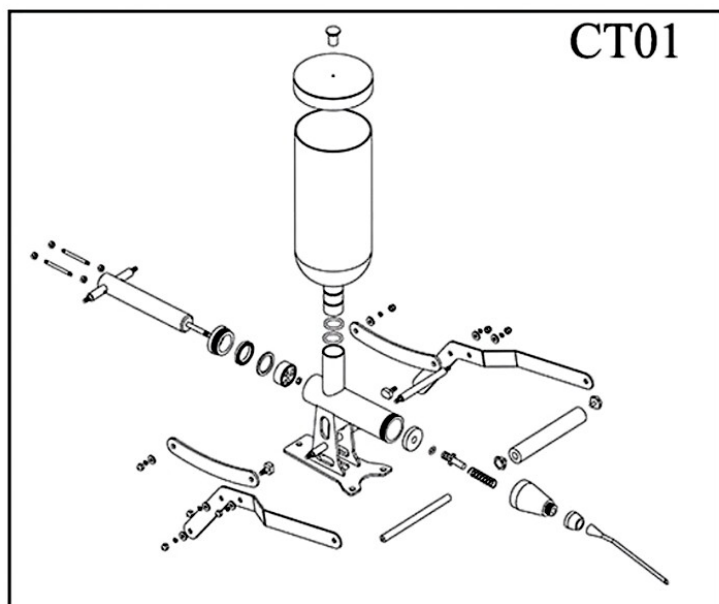

When you got this machine, most of parts are assembled.


You just need to assemble the Container and Filling pipe.

If you want to know more about this part, refer to the following steps .

1. Assemble the connecting rod with an M6 lock nut and washer (see S1 below).



S1

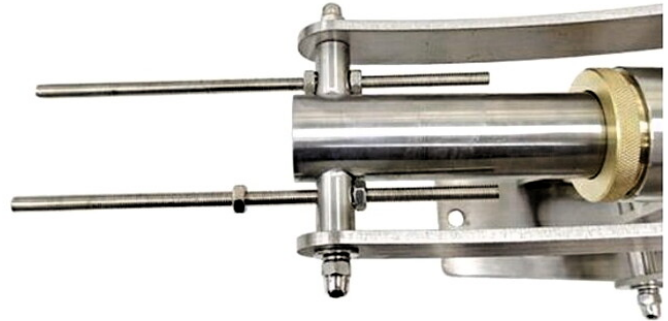

S2

2. Install two positioning rods with M6 lock nuts (see S2 above).

3. Choose a suitable filling tube and install it on a small funnel. Then install the container (see S3 and S4 above).



S3



S4

4. Finally, the entire filling machine is completed and assembled.



CT-01



CT-03

! If you want a more precise filling volume, please install the rod of dosing device, and then tighten the nut (see S2 above).

